


38 729 00D UNISSET ELEMENT FOR WC WITH FLUSHING CISTERN 80 MM



PRODUCT DESCRIPTION

- 4.5 l
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- outlet bend \varnothing 80 mm
- inlet and outlet connecting set
- steel frame, hot galvanized, with 4 fixing brackets
- 2 WC fixing bolts
- distance of fixing bolts 180/230 mm
- fixing device for ceramic
- water supply connection from top
- low noise (group I acc. to German Noise Specification)
- with plaster base coating made of vinyl fleece
- angle valve 15 mm ($\frac{1}{2}$ ")
- with push fit flexible hose union
- Shortable inspection shaft incl. protection during construction phase
- for vertical use
- for mounting of small flush plates revision shaft 40 949 000 to be ordered separately

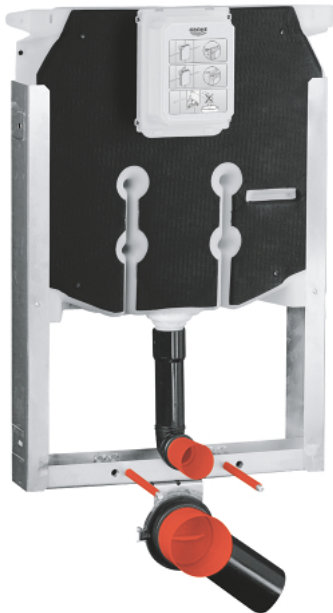