


39 376 000 **RAPID SL ELEMENT FOR URINAL WITH TEMPERATURE SENSOR**




PRODUCT DESCRIPTION

- with roughing-in set for T sensor
- 1.13 and 1.30 m installation height
- for on-the-wall installations or studded walls
- powder coated steel frame, self-supporting
- for dry-cladding, completely pre-assembled
- height adjustable fitting connections
- TÜV approved
- HT-outlet bend Ø 50 mm
- fixing bolts M8, with fixing device for the ceramic
- inlet connection and inlet connecting set
- box for concealed installation including roughing-in box
- stop valve and flush elbow
- for T sensor electronic installation set 39 368 or 39 369 needs to be ordered separately
- for on-the-wall installation wall brackets 38 558 00M need to be ordered separately

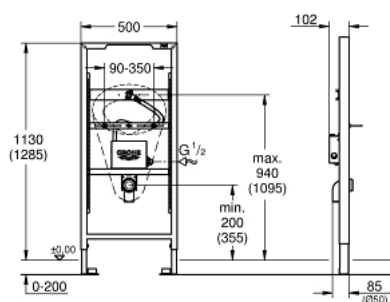

39 376 000 **RAPID SL ELEMENT FOR URINAL WITH TEMPERATURE SENSOR**



SPARE PARTS

- 1: Elbow 2" (Spare part-nr. 42943000)
- 1.1: Holder for outlet elbow (Spare part-nr. 42236000)
- 2: Switching power supply (Spare part-nr. 42470000)
- 3: Fastening set (Spare part-nr. 4307500M)
- 4: Threaded bolt (Spare part-nr. 43078000)
- 5: Lip seal (Spare part-nr. 4387500M)
- 6: Wall brackets

(Spare part-nr. 3855800M)